



Lubecore is pleased to announce the next-generation of the Lubecore Smart Switch Dash Label. Made from aluminium, this label adds a professional look in today's well-appointed equipment cabins. This sleek design and easy installation procedure will guarantee customers satisfaction.

#### **Improvements:**

- 1. Aluminum—Brushed finish with adhesive back.**
- 2. 43.3% reduction in size of label—Easier to fit.**
- 3. Increased Lubecore logo size — Improved brand recognition and repeat business.**

**next generation automated lubrication**



1. Package includes Lubecore Smart Switch, aluminum label, O-ring, and 1/2" nut.

2. Drill hole in desired spot using 15/32" or 12mm drill bit.


**Note:** Ensure drill spot is clear of electronics and other components. Place aluminum label over hole using adhesive.



3. Feed O-ring through wiring, push into place on the back of the Smart Switch.



4. Pull Lubecore system Smart Switch through the hole created. Take 1/2 inch nut and thread onto the back of the test light, do not over tighten.

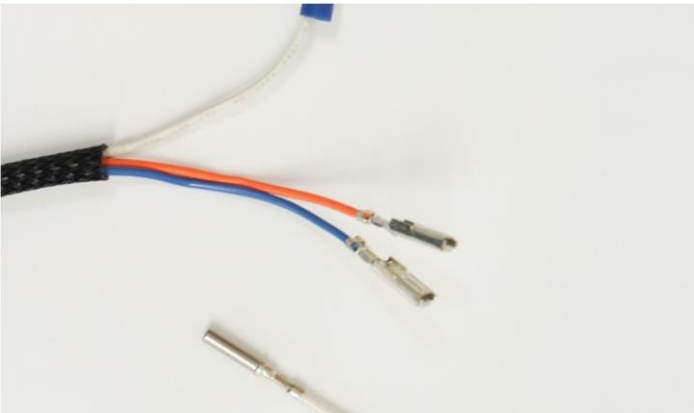

5. Connect wiring to Lubecore timer. Orange wire attaches to #8 on timer. Blue wire attaches to #11 on timer. White attaches to 6pin Deutsch Common Ground on 13.047 timer harness. (Further instructions available on document 75.001).

6. Once connected, the Smart Switch will communicate pump operation and alarms. The push button can initiate a single test cycle (3 sec. push and release) or accelerated cycle (10 sec. push and release).